



TEW-511BRP 108Mbps 802.11a+g Wireless Firewall Router

The TRENDnet TEW-511BRP Dual-Band 802.11 a+g Wireless Router combines features from a wired router and wireless access point to create an all-in-one network solution for home or small office. Wireless clients equipped with the TEW-501PC 802.11a/g adapter can take advantage of Super A+G technology by using frame bursts, fast frames, frame compression, and dynamic turbo to reach speeds up to 108 Mbps. A built-in 4 port switch connects wired workstations to your network while the access point connects standard 802.11a/b/g wireless clients. TEW-511BRP's is an ideal appliance for sharing Internet access and network resources. The TEW-511BRP firewall protects your network from hackers while WEP and WPA encryptions safe guard wireless transmission.

FEATURES

- Wi-Fi Compliant with IEEE 802.11a, 802.11g and IEEE 802.11b Standards
- Uses 5 GHz or 2.4 GHz Dual Band Design, which Complies with Worldwide Requirements
- 4 x 10/100Mbps Auto-MDIX LAN Ports and 1 x 10/100Mbps WAN Port (Internet)
- Supports Cable/DSL Modems with Dynamic IP, Static IP, PPPoE, or PPTP Connection Types
- Supports Super G technology Data Rate up to 108Mbps
- DHCP Server Feature Allocates up to 253 Client IP Addresses
- 64/128-bit WEP, WPA (Pre-Shared Key or RADIUS) supports TKIP or AES Algorithm
- Supports MAC Address, IP, and Protocol Filters
- Traffic Control with Virtual Server and DMZ
- Provides Additional Security of Enable/Disable SSID, Password Protection
- Supports Static/Dynamic Routing and Dynamic DNS
- Supports Multiple and Concurrent IPsec and PPTP VPN Pass-Through Sessions
- Flash Memory for Firmware Upgrade, Save/Restore Settings, and Traffic Log
- Easy Management via Web Browser (HTTP) and Remote Management
- Compliant with Windows 95/98/NT/2000/XP/2003 Server, Linux and Mac OS
- Range of 30 ~ 100 meters Indoor(depends on the environment)
- Range of 50 ~ 300 meters Outdoor(depends on the environment)
- 3-Year Warranty



WIRELESS

TEW-511BRP

108Mbps 802.11a+g Wireless Firewall Router

SPECIFICATIONS


Hardware

Standards	• Wired: IEEE 802.3 (10Base-T), IEEE 802.3u (100Base-TX) • Wireless: IEEE 802.11a (54Mbps), 802.11b (11Mbps), IEEE 802.11g (54Mbps)
WAN	• 1 x 10/100Mbps Auto-MDIX Port (Internet)
LAN	• 4 x 10/100Mbps Auto-MDIX Port
Connection Type	• Dynamic IP, Static (Fixed) IP, PPPoE, PPTP
Advance Features	• DHCP Client/Server, SPI, NAT, PPPoE Client, DNS Proxy/Relay, Dynamic DNS, DMZ Hosting, VPN Pass-Through (IPSec, PPTP, L2TP), NTP UPnP, NAT Traversal
Protocol Support	• TCP/IP, NetBEUI, IPX/SPX
LED Indicator	• Power, DMZ, 11a, 11g, LAN, Internet
Dimensions (LxWxH)	• 198 x 160 x 33 mm (7.8 x 6.3 x 1.2inches)
Weight	• 0.7kg (1.54 lbs)
Temperature	• Operating: 0°~ 40°C (32°F~ 104°F) • Storage: -20°~ 70°C (4°F~ 158°F)
Humidity	• Max. 90% (non-condensing)
Power Adapter	• 5V DC, 2.5A External Power Adapter
Certification	• FCC, CE

Wireless

Frequency	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11a/g: OFDM with BPSK, QPSK and 16/64-QAM Sub-Carrier Modulations
Module Technique	• 802.11a: UNI-Band 5.15 ~ 5.825 GHz (subject to local regulations) • 802.11b/g: ISM-Band 2.412 ~ 2.4835 GHz
Antenna	• 802.11a: 4dBi (Peak Gain); 802.11b/g: 2dBi (Peak Gain) • 2 x Dual Band Diversity Detachable Antenna (Female Reverse SMA Connector)
Media Access Protocol	• CSMA/CA with ACK
Security	• 64/128-bit WEP & WPA • 802.1X (EAP-MD5/TLS/TTLS) • SSID Broadcast Control, MAC Filter, IP Filter, Content Filter • Time-of-Day ACL
Transmit Power	• 802.11a: 16dBm (max) @ 16QAM R3/4 • 802.11b: 18dBm (typical) • 802.11g: 16dBm (typical)
Data Rate	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps • Super AG: 108Mbps
Receiving Sensitivity	• 108Mbps 10 5 BER @ -69 dBm (Turbo Mode) • 54Mbps 10 5 BER @ -72 dBm ; 48Mbps 10 5 BER @ -75 dBm • 36Mbps 10 5 BER @ -82 dBm ; 24Mbps 10 5 BER @ -85 dBm • 18Mbps 10 5 BER @ -88 dBm ; 12Mbps 10 5 BER @ -89 dBm • 9Mbps 10 5 BER @ -90 dBm ; 6Mbps 10 5 BER @ -91 dBm
Channels	• 11a: Subject to Local Regulations • 11b/g: 1~ 11 (US), 1~13 (EU)

NETWORKING SOLUTIONS

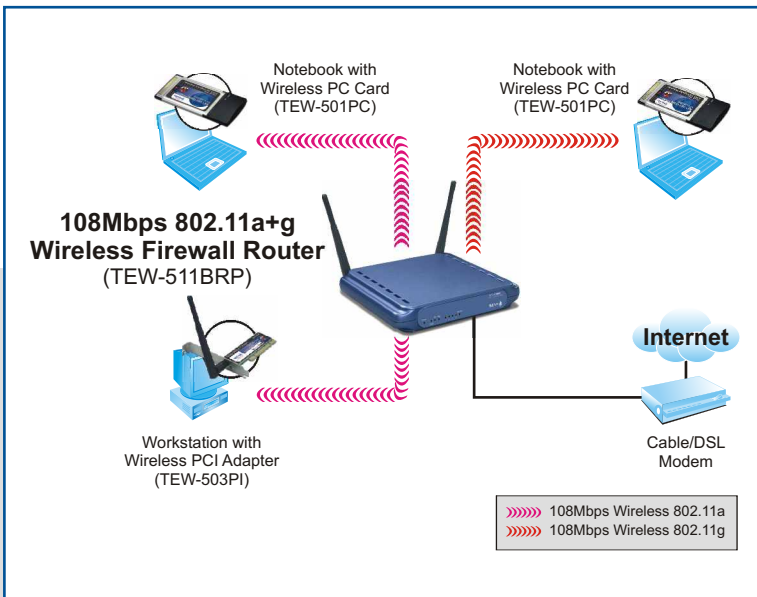

PACKAGE CONTENTS

- TEW-511BRP
- CD-ROM (User's Guide)
- Multi-Language Quick Installation Guide
- Power Adapter (5V, 2A)
- RJ-45 Cable (1.5m/5ft.)

RELATED PRODUCTS

TEW-501PC	• 108Mbps 802.11a/g Wireless CardBus PC Card
TEW-503PI	• 108Mbps 802.11a/g Wireless PCI Adapter
TEW-504UB	• 108Mbps 802.11a/g Wireless USB 2.0 Adapter

ORDERING INFORMATION

TRENDnet
 3135 Kashiwa Street, Torrance, CA 90505 USA
 Tel: 1-888-777-1550
 Fax: 1-310-891-1111
 Web: www.TRENDNET.com
 Email: sales@trendnet.com

To Order Please Call:
1-888-326-6061